


AH-0315

Multi-Purpose Smoke and Heat Detector

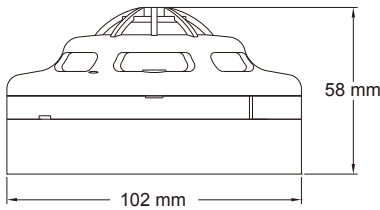

Specifications

Model	AH-0315-2	AH-0315-3	AH-0315-4
Voltage Range	12 ~ 30V DC		
Standby Current @24V DC 470Ω	under 55μA		
Alarm Current @24V DC 470Ω	40mA	30mA	40mA
Sensitivity Setting	Comply to EN54		
Thermal Setting	58°C		
Response Grade	Comply to EN54, Grade 1		
Ambient Temperature	-10°C ~ +55°C		
Material	Fire-proof plastic		
Dimensions	102mm(Dia.) x 58mm(H)		
Weight	155g	157g	165g
Color	White		

Order information

AH-0315-2	2-wire
AH-0315-3	3-wire with remote indicator output
AH-0315-4	4-wire with relay output

Specifications (Resettable)

Model	AH-0315-S	AH-0315-BS	AH-0315-BPS
Alarm Current	25mA	65mA	80mA
Standby Current	125μA	125μA	15mA
Voltage Range	12V DC	12V DC	12V DC
Weight	164g	166g	171g

Order informations (Resettable)

AH-0315-S	+ Relay Output
AH-0315-BS	+ Buzzer + Relay Output
AH-0315-BPS	+ Buzzer + Power off & Wire Disconnection Warning + Relay Output

Effective alert area

Building Height	Area Covered
Under 4M	150 M ²
4 ~ 20M	75 M ²

